

**3.0A Single-Phase GLass Passivated Bridge Rectifiers**

Rectifier Reverse Voltage 50V to 1000V

**玻璃钝化桥式整流器****Features**

- Glass passivated junction
- The plastic material used carries Underwriters Laboratory flammability recognition 94V-0
- Surge overload ratings to 50 amperes peak
- Ideal for printed circuit board application
- High temperature soldering guaranteed 265 °C/10 seconds at 5 lbs(2.3kg)tension

**Mechanical Data**


Case:Molded plastic

Terminals:Platde leads solderable per MIL-STD-750, Method 2026

Polarity:Polarity symbols molded or Marked on body

Mounting Position:Any

Weight:0.011ounce,0.32 grams(approx)

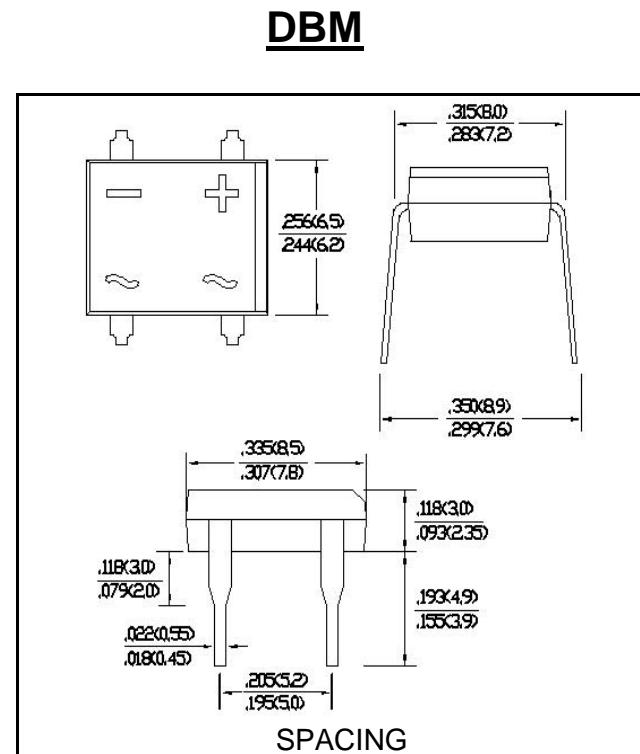**Maximum Ratings & Thermal Characteristics**

Rating at 25°C ambient temperature unless otherwise specified, Resistive or inductive load, 60HZ.

For Capacitive load derate current by 20%

Parameter	Symbol	DB301	DB302	DB303	DB304	DB305	DB306	DB307	unit
Maximum repetitive peak reverse voltage	VRRM	50	100	200	400	600	800	1000	V
Maximum RMS bridge input voltage	VRMS	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	VDC	50	100	200	400	600	800	1000	V
Maximum average forward rectified output current at TA=40°C	IF(AV)				3.0				A
Peak forward surge current single sine-wave superimposed on rated load (JEDEC Method)	IFSM				85				A
Rating for fusing(t<8.3ms)	I <sup>2</sup> t				10				A <sup>2</sup> sec
Typical thermal resistance per element(1)	ReJA				110				°C/W
Typical thermal resistance per element(2)	C <sub>j</sub>				25.0				PF
Operating junction and storage temperature range	T <sub>j</sub> , T <sub>STG</sub>				-55to+150				°C

**Electrical Characteristics**

Rating at 25°C ambient temperature unless otherwise specified, Resistive or inductive load, 60HZ.

For Capacitive load derate current by 20%


Parameter	Symbol	DB301	DB302	DB303	DB304	DB305	DB306	DB307	unit
Maximum instantaneous forward voltage drop per leg at 3.0A	VF				1.1				V
Maximum DC reverse current at ratde TA=25°C DC blocking voltage per element TA=125°C	IR				10				UA

Notes:(1)Thermal resistance from Junction to Ambent on P.C.board mounting.


(2)Measured at 1.0MHz and applied reverse voltage of 4.0 volts.

## Rating and Characteristic Curves (TA=25°C Unless otherwise noted)


**FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE**

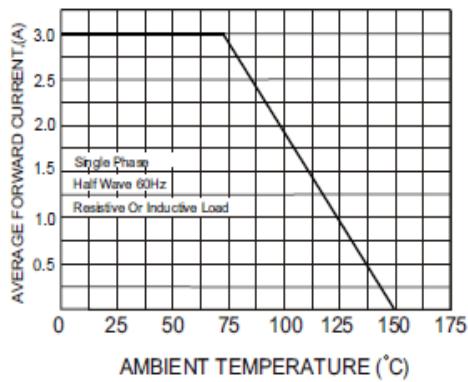

**FIG.2-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT**

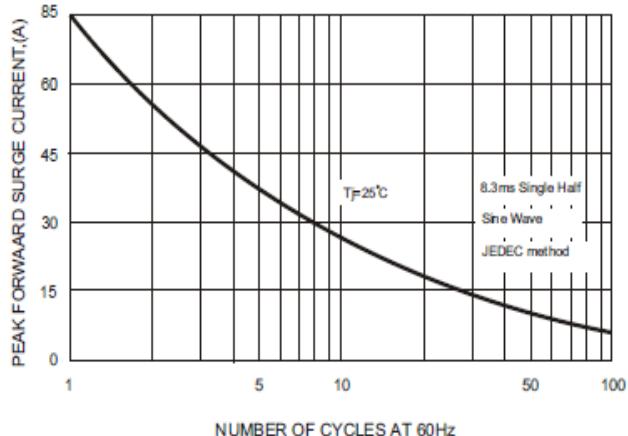

**FIG.3-TYPICAL FORWARD CHARACTERISTICS**

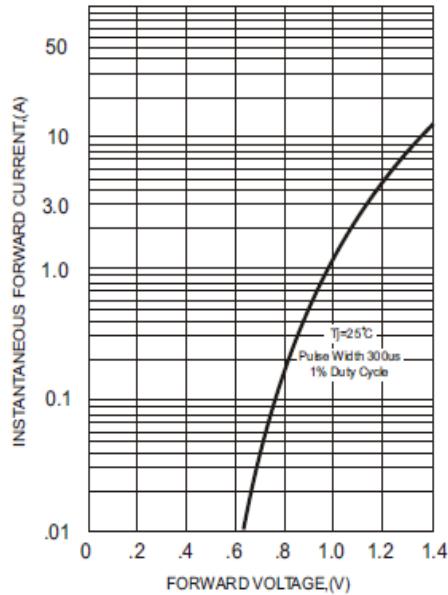

**FIG.4-TYPICAL REVERSE CHARACTERISTICS**

