

Surface Mount Fast Recovery Rectifiers

Reverse Voltage - 50 to 1000 V

Forward Current - 1 A

FEATURES

- For surface mounted applications
- Low profile package
- Glass Passivated Chip Junction
- Ideal for automated placement
- Fast reverse recovery time
- Lead free in comply with EU RoHS 2011/65/EU directives

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode



Simplified outline SOD-123FL and symbol

MECHANICAL DATA

- Case: SOD-123FL
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 15mg 0.00053oz

Maximum Ratings and Electrical characteristics

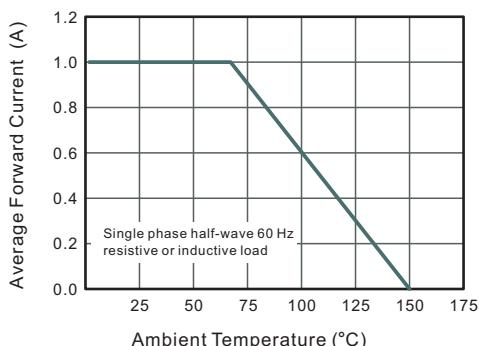
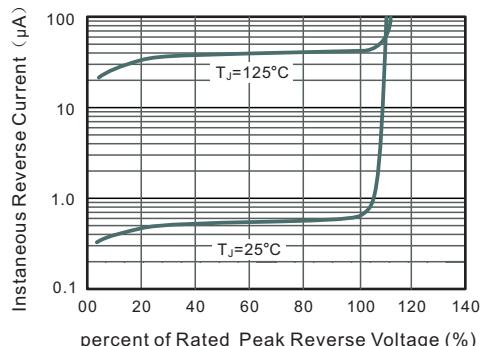
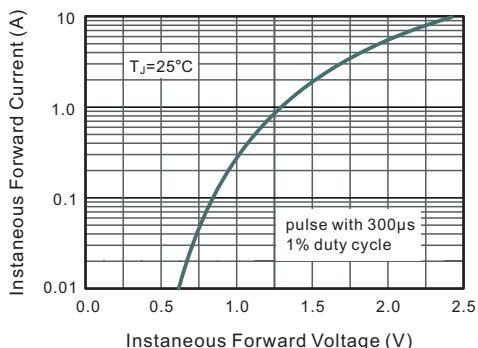
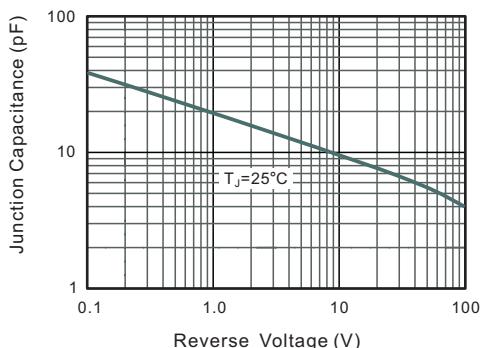
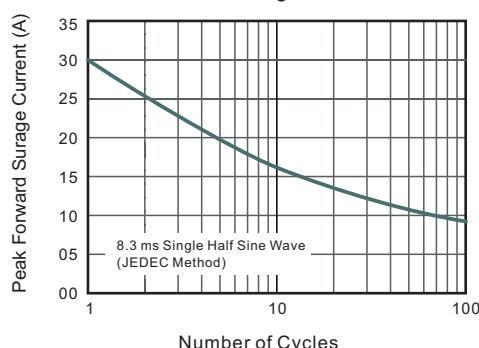
Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20 %.

Parameter	Symbols	F1	F2	F3	F4	F5	F6	F7	Units			
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	V			
Maximum RMS voltage	V _{RMS}	35	70	140	280	420	560	700	V			
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	V			
Maximum Average Forward Rectified Current at Ta = 65 °C	I _{F(AV)}	1							A			
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method)	I _{FSM}	30							A			
Maximum Instantaneous Forward Voltage at 1 A	V _F	1.3							V			
Maximum DC Reverse Current Ta = 25 °C at Rated DC Blocking Voltage Ta = 125 °C	I _R	5 100							µA			
Maximum Reverse Recovery Time ¹⁾	t _{rr}	150			250	500			ns			
Typical Junction Capacitance at V _R =4V, f=1MHz	C _j	15							pF			
Typical Thermal Resistance ²⁾	R _{θJA}	120							°C/W			
Operating and Storage Temperature Range	T _j , T _{stg}	-55 ~ +150							°C			

1) Measured with I_F = 0.5 A, I_R = 1 A, I_{rr} = 0.25 A.

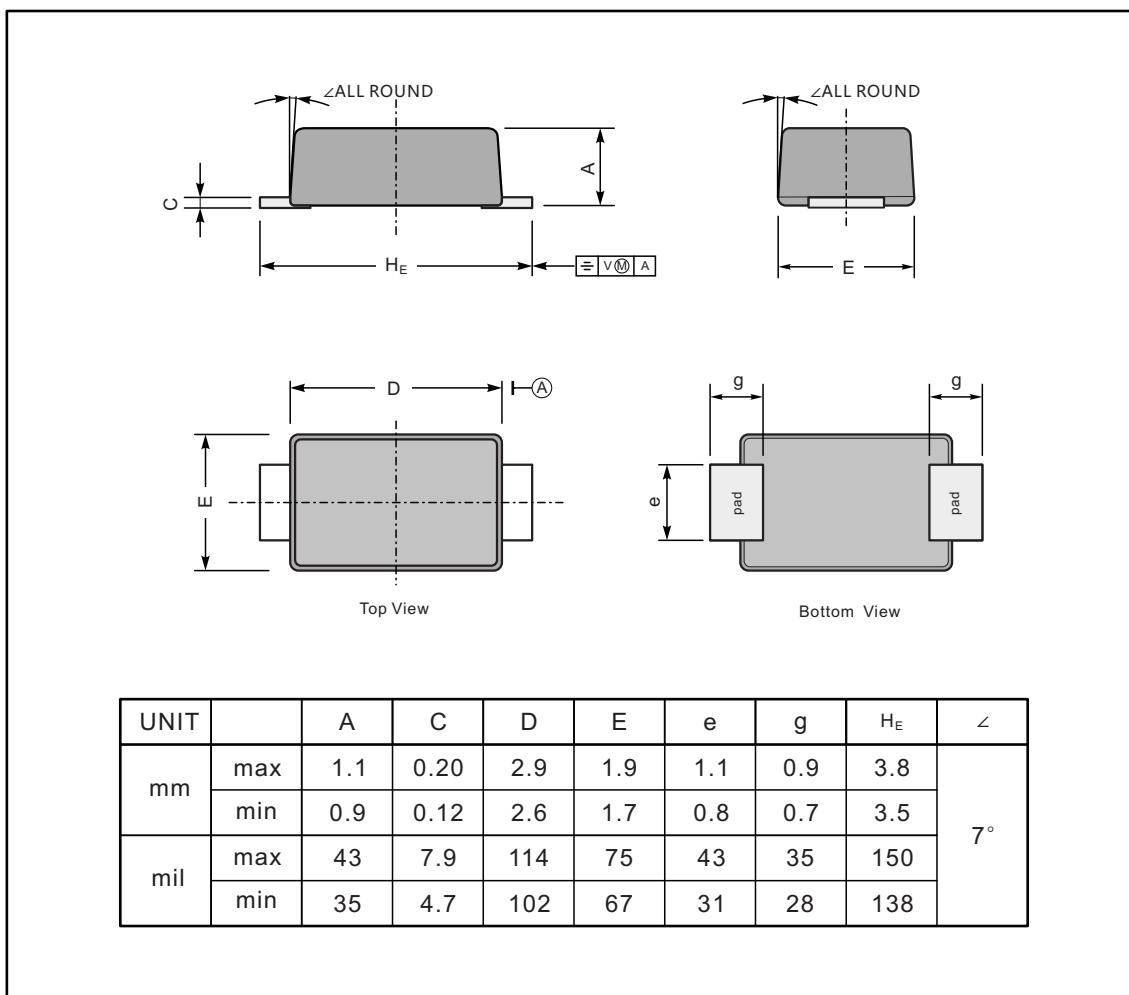
2) P.C.B. mounted with 0.2 X 0.2" (5 X 5 mm) copper pad areas.

Fig.1 Forward Current Derating Curve

Fig.2 Typical Reverse Characteristics

Fig.3 Typical Instantaneous Forward Characteristics

Fig.4 Typical Junction Capacitance

Fig.5 Maximum Non-Repetitive Peak Forward Surge Current


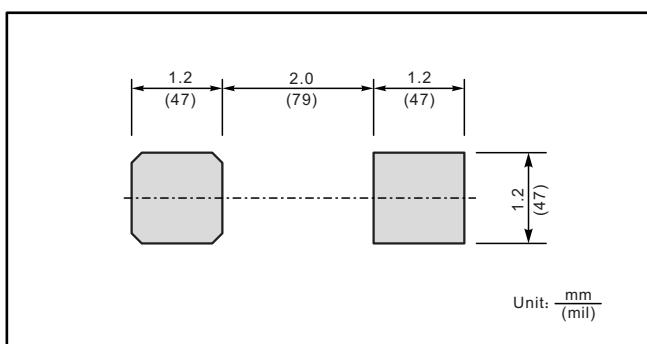
PACKAGE OUTLINE

Plastic surface mounted package; 2 leads

SOD-123FL



The recommended mounting pad size



Marking

Type number	Marking code
FR101W	F2
FR102W	
FR103W	
FR104W	
FR105W	F5
FR106W	F7
FR107W	